




SHORT PROBE SHCP SERIES

CONNECTOR PIN (MULTIPURPOSE PROBE)

PROBE SPECIFICATIONS

(Material) Plunger = Brass/Gold Plating Spring = Piano Wire/Gold Plating Barrel = Brass/Gold Plating

SHCP-1503R-70T

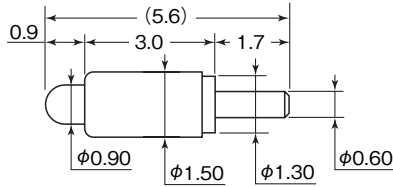


PROBE SPECIFICATIONS

Stroke	0.9mm
Current	3A
Resistance	>50mΩ

SPRING SPECIFICATIONS

Initial Load	0.29N (30gf)
0.7 stroke	0.69N (70gf)
Durability	50K

SHCP-1003R-60T

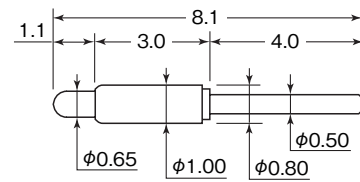


PROBE SPECIFICATIONS

Stroke	1.0mm
Current	3A
Resistance	>30mΩ

SPRING SPECIFICATIONS

Initial Load	0.22N (22gf)
0.7 stroke	0.59N (60gf)
Durability	50K

SHCP-2020R-75T

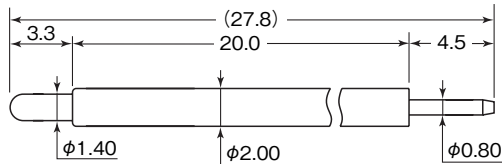


PROBE SPECIFICATIONS

Stroke	3.3mm
Current	3A
Resistance	>30mΩ

SPRING SPECIFICATIONS

Initial Load	0.24N (24gf)
2.0 stroke	0.66N (67gf)
Durability	100K

SHCP-0807R-60T

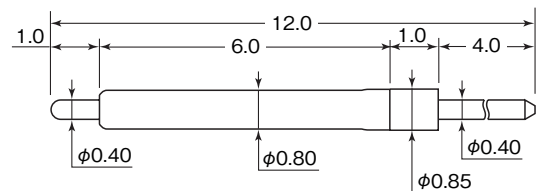


PROBE SPECIFICATIONS

Stroke	1.0mm
Current	2A
Resistance	>30mΩ

SPRING SPECIFICATIONS

Initial Load	0.29N (30gf)
0.7 stroke	0.59N (60gf)
Durability	20K

※ We can adjust Tip Shape, Dimensions and Spring load to fit your needs.
Please fill in the chart below and contact us.

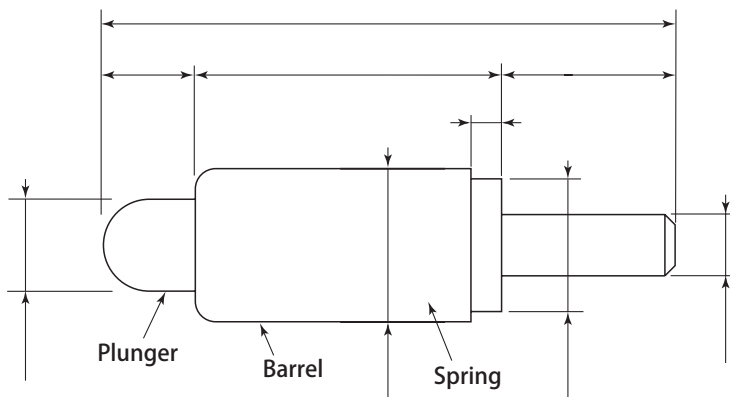

C	R	F	X	V	W

PROBE SPECIFICATIONS

Stroke	mm
Current	A
Resistance	> mΩ

SPRING SPECIFICATIONS

Initial Load	N(gf)
() stroke	N(gf)
Durability	Rev.

MATERIAL SPECIFICATIONS • PLATING (GOLD)

Plunger	Brass	Plating
Barrel	Brass	Plating
Spring	Piano Wire	Plating

(Dimensions : mm)

Note * The amount and delivery date that can be produced need arrangements.