

0.80mm
35mil


PITCH

PTP-5 SERIES

- Full Stroke 2.0mm
- Recommended Working Stroke 1.3mm
- Electrical Current Rating 2A




PROBE SPECIFICATIONS

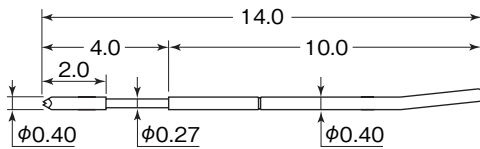

ASSEMBLED DIAGRAM

Example: Probe PTP-5C2
Socket PTF-50-RS-038

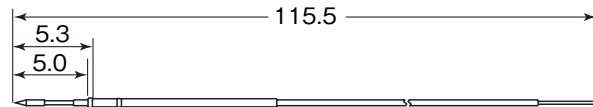

PRODUCT NAME PTP-5 ● - ▲ **GCA** (Material) Plunger = Tool Steel/Gold Plating
Spring = Piano Wire/Gold Plating
Barrel = Phosphorous Bronze/Precious Metal Clad


● Tip Shapes

Please select from the following diagrams:

▲ Spring Force

[Initial Load : Load at 2/3 stroke]
1 = [0.12 (13) : 0.39N (40gf)]

● TIP SHAPES

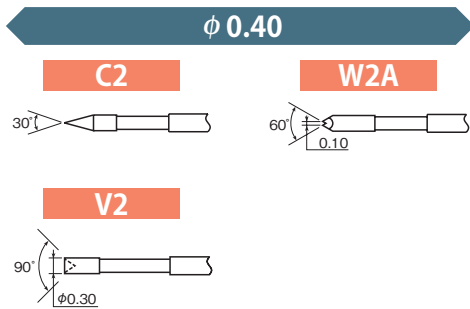

SOCKET SPECIFICATIONS


Material : Phosphorous Bronze/Gold Plating

PRODUCT NAME

PTF-50-RS-038 (Color of Lead Wire=Blue)

PTF-50-RS-056 (Color of Lead Wire=Green)

Socket with Lead Wire

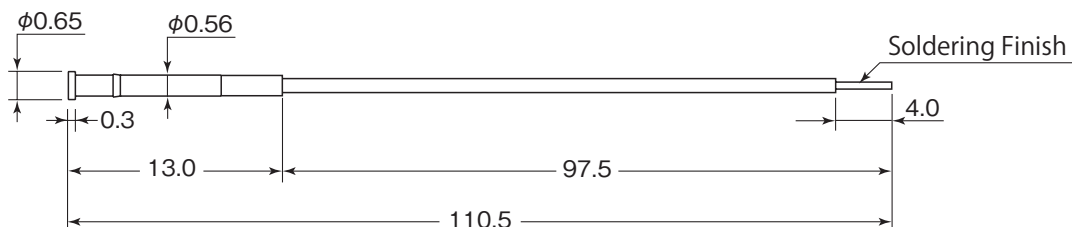

(Dimensions : mm)



* Other models are available. Please contact us for details.
* The above specifications are subject to change without notice.