




- ◇ **SPECIAL FEATURES** As the CXS Coaxial Probe use contact probes, a variety of tip shapes can be selected to suit your purpose and replacement is made easy.
- ◇ **CAPACITY** Frequency 3.6GHz  
Impedance = 50Ω

**NEW**

**PRODUCT NAME CXS-50-SESMAB**

(Specifications)


Probe = PTP-4C1L-3GA Outside Conductor = Phosphorous Bronze/Gold Plating  
Dielectric = PTFE ※ Probe to be sold separately.

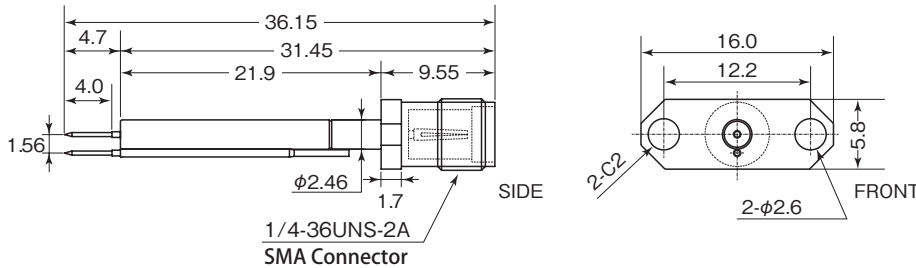

**PRODUCT NAME CXS-50ST-PO6PDG**

(Specifications)

Probe = PTP-4 SERIES Outside Conductor = Brass/Gold Plating  
Dielectric = PTFE ※ Probe to be sold separately.

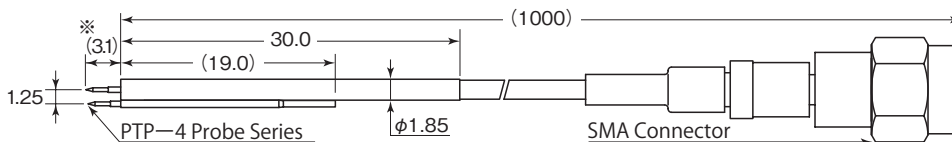


※ The probe ejection length depends on the total length of the probe.

**PRODUCT NAME CXS-3ST-HRMG**

(Specifications)

Probe = PTP-3 SERIES Outside Conductor = Brass/Gold Plating  
Dielectric = PTFE ※ Probe to be sold separately.

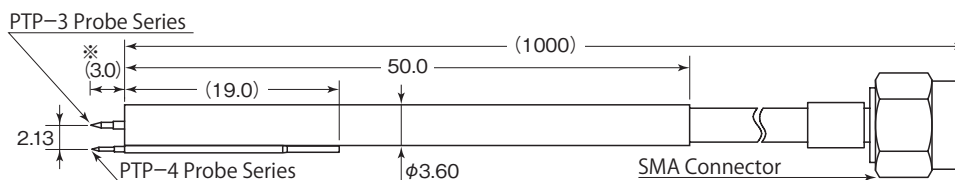


※ The probe ejection length depends on the total length of the probe.

**PRODUCT NAME CXS-3XW**

(Specifications)


Probe = PTP-3 SERIES Outside Conductor = Brass/Gold Plating  
Dielectric = PTFE ※ Probe to be sold separately.

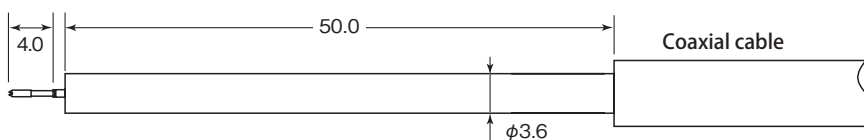

**PRODUCT NAME CXS-MSS-R46**

(Specifications)

Probe = PTP-2L SERIES Outside Conductor = Brass/Gold Plating  
Dielectric = PTFE ※ Probe, connecting plug MSS-P-1.5 to be sold separately.

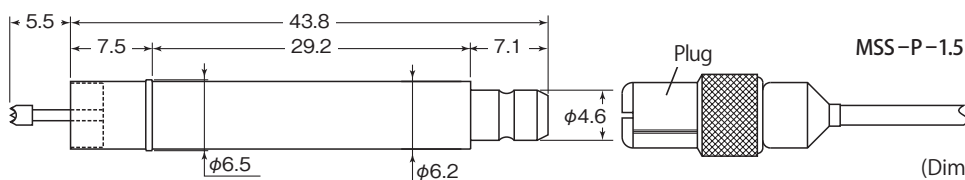

(Dimensions : mm)

**Note** ※ The above specifications are subject to change without notice.